

## ***300mA, Low Noise High PSRR LDO Regulator***

### **Description**

The FP6185 is a low dropout, low noise, high PSRR, very low quiescent current positive linear regulator. The FP6185 can supply 300mA output current with low dropout voltage at about 180mV that optimized for battery-powered systems or portable wireless devices such as mobile phones. The shutdown function can provide remote control for the external signal to decide the on/off state of FP6185 that consumes less than 0.1 $\mu$ A during shutdown mode.

The FP6185 regulator is able to operate with output capacitors as small as 1 $\mu$ F for stability. Other than the current limit protection, FP6185 also offers the on chip thermal shutdown feature providing protection against overload or any condition when the ambient temperature exceeds the maximum junction temperature.

The FP6185 offers high precision output voltage of  $\pm 1\%$ . The FP6185 is available in SOT-23-5 package which features small size.

### **Features**

- Low  $V_{IN}$  and Wide  $V_{IN}$  Range: 1.75V to 5.5V
- Output Current 300mA<sup>\*1</sup>
- $\pm 1\%$  Output Voltage Accuracy
- Output Noise 65 $\mu$ Vrms from 10Hz to 100kHz
- $V_{OUT}$  Fixed 1.1V to 3.3V
- Low Dropout Voltage of 180mV at 2.5V/300mA
- Ripple Rejection 65dB at 1kHz
- Very Low Quiescent Current at 2 $\mu$ A
- Needs Only 1 $\mu$ F Capacitor for Stability
- Inrush Current Protection
- Current Foldback Protection
- Thermal Shutdown Protection
- Current Limit Protection
- Output Discharge Function
- SOT-23-5 Package
- RoHS Compliant

\*1. Attention should be paid to the power dissipation of the package when the output current is large.

### **Applications**

- PDAs, Mobile phones, GPS, Smartphones
- Wireless Handsets, Wireless LAN, Bluetooth®, Zigbee®
- Portable Medical Equipment
- Other Battery Powered Applications

## Pin Assignment

S5 Package: SOT-23-5




Figure 1. Pin Assignment of FP6185

## Ordering Information

|         |                |                                                                                                                   |
|---------|----------------|-------------------------------------------------------------------------------------------------------------------|
| FP6185- |                |                                                                                                                   |
|         | Package Type   | S5: SOT-23-5                                                                                                      |
|         | Output Voltage | 11: 1.1V 12: 1.2V<br>15: 1.5V 18: 1.8V<br>20: 2.0V 25: 2.5V<br>27: 2.7V 28: 2.8V<br>29: 2.9V 30: 3.0V<br>33: 3.3V |

## Marking Information

| Part Number | Product Code |
|-------------|--------------|
| FP6185-11S5 | FU4          |
| FP6185-12S5 | FD8          |
| FP6185-15S5 | FD9          |
| FP6185-18S5 | FE1          |
| FP6185-20S5 | FX2          |
| FP6185-25S5 | FU5          |
| FP6185-27S5 | FU6          |
| FP6185-28S5 | FE3          |
| FP6185-29S5 | FE2          |
| FP6185-30S5 | FU7          |
| FP6185-33S5 | FE4          |

Note: Please consult Fitipower sales office or authorized distributors for availability of special output voltages.

## Typical Application Circuit

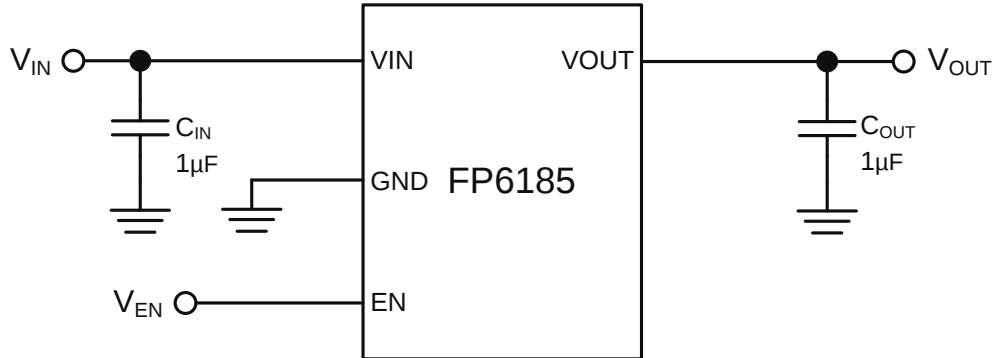


Figure 2. Typical Application Circuit of FP6185

Note1: To prevent oscillation, it is recommended to use minimum 1  $\mu$ F X7R or X5R dielectric capacitors if ceramics are used as input/output capacitors.

## Functional Pin Description

| Pin Name | Pin No. | Pin Function                                                                                                                                                                                                                                    |
|----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VIN      | 1       | Power is supplied to this device from this pin which is required an input filter capacitor. In general, the input capacitor in the range of 1 $\mu$ F to 10 $\mu$ F is sufficient.                                                              |
| GND      | 2       | Common ground pin.                                                                                                                                                                                                                              |
| EN       | 3       | Pull this pin high to enable IC, pull this pin low to shutdown IC. Floating this pin will be shutdown due to the built-in pull-low resistor.                                                                                                    |
| NC       | 4       | No connection.                                                                                                                                                                                                                                  |
| VOUT     | 5       | The FP6185 is stable with an output capacitor 1 $\mu$ F or greater. The larger output capacitor will be required for application with larger load transients. The large output capacitor could reduce output noise, improve stability and PSRR. |

## Block Diagram

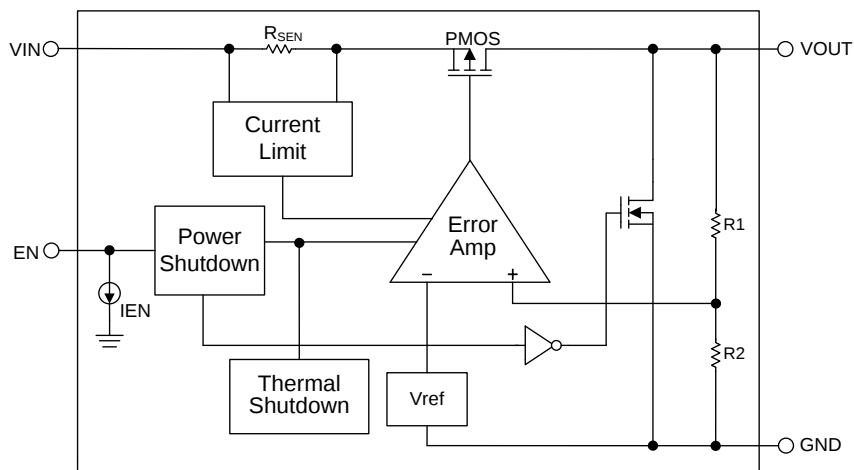


Figure 3. Block Diagram of FP6185

## Absolute Maximum Ratings <sup>(Note 2)</sup>

- Input Voltage  $V_{IN}$  ----- -0.3V to +6.5V
- Output Voltage  $V_{OUT}$  ----- -0.3V to +6.5V
- EN Voltage  $V_{EN}$  ----- -0.3V to  $V_{IN} + 0.3V$
- Power Dissipation @  $T_A = 25^\circ C$  &  $T_J = 125^\circ C$  ( $P_D$ )
  - SOT-23-5 ----- 0.4W
- Package Thermal Resistance ( $\theta_{JA}$ ) <sup>(Note 3)</sup>
  - SOT-23-5 -----  $250^\circ C/W$
- Package Thermal Resistance ( $\theta_{JC}$ )
  - SOT-23-5 -----  $130^\circ C/W$
- Lead Temperature (Soldering, 10sec.) -----  $+260^\circ C$
- Junction Temperature ( $T_J$ ) -----  $-40^\circ C$  to  $+150^\circ C$
- Storage Temperature ( $T_{STG}$ ) -----  $-65^\circ C$  to  $+150^\circ C$

Note 2: Stresses beyond this listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

Note 3:  $\theta_{JA}$  is measured at  $25^\circ C$  ambient with the component mounted on a high effective thermal conductivity 4-layer board of JEDEC-51-7. The thermal resistance greatly varies with layout, copper thickness, number of layers and PCB size.

## Recommended Operating Conditions

- Supply Voltage  $V_{IN}$  ----- +1.75V to +5.5V
- Output Current  $I_{OUT}$  ----- 0mA to 300mA
- Operating Ambient Temperature Range -----  $-40^\circ C$  to  $+85^\circ C$
- Operating Junction Temperature Range -----  $-40^\circ C$  to  $+125^\circ C$

## Electrical Characteristics

( $V_{IN}=V_{OUT}+1V$ , EN pin connected to  $V_{IN}$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified.)

| Parameter                                                 | Symbol               | Conditions                                                                                                                                                    |                         | Min  | Typ | Max | Unit              |
|-----------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|-----|-----|-------------------|
| Input Voltage Range                                       | V <sub>IN</sub>      |                                                                                                                                                               |                         | 1.75 |     | 5.5 | V                 |
| Quiescent Current <sup>(Note 4)</sup>                     | I <sub>Q</sub>       | I <sub>OUT</sub> =0A                                                                                                                                          |                         |      | 2   | 4   | μA                |
| Standby Current                                           | I <sub>STBY</sub>    | EN Pin Connected to GND                                                                                                                                       |                         |      | 0.1 | 1   | μA                |
| Output Voltage Accuracy                                   | ΔV <sub>OUT</sub>    | I <sub>OUT</sub> =1mA                                                                                                                                         |                         | -1   |     | +1  | %                 |
| Dropout Voltage <sup>(Note 5)</sup>                       | V <sub>DROP</sub>    | I <sub>OUT</sub> =300mA                                                                                                                                       | V <sub>OUT</sub> =1.0V  |      | 650 | 850 | mV                |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =1.05V |      | 590 | 770 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =1.1V  |      | 530 | 690 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =1.2V  |      | 440 | 570 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =1.5V  |      | 350 | 460 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =1.8V  |      | 230 | 300 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =2.2V  |      | 215 | 280 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =2.5V  |      | 180 | 230 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =2.8V  |      | 160 | 210 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =3.0V  |      | 150 | 200 |                   |
|                                                           |                      |                                                                                                                                                               | V <sub>OUT</sub> =3.3V  |      | 135 | 180 |                   |
| Line Regulation                                           | ΔV <sub>LINE</sub>   | I <sub>OUT</sub> =1mA, V <sub>IN</sub> =V <sub>OUT</sub> +1V to 5V                                                                                            |                         |      | 1   | 8   | mV                |
| Load Regulation <sup>(Note 6)</sup>                       | ΔV <sub>LOAD</sub>   | I <sub>OUT</sub> =0A to 300mA                                                                                                                                 |                         |      | 6   | 30  | mV                |
| Ripple Rejection <sup>(Note 7)</sup>                      | PSRR                 | V <sub>IN</sub> =V <sub>OUT</sub> +1V <sub>DC</sub> +0.2V <sub>P-P(AC)</sub> ,<br>f <sub>RI</sub> PPLE=1KHz,V <sub>OUT</sub> =1.2V,<br>I <sub>OUT</sub> =30mA |                         |      | 65  |     | dB                |
| Output Noise Voltage <sup>(Note 7)</sup>                  | V <sub>NOISE</sub>   | C <sub>OUT</sub> =1μF, I <sub>OUT</sub> =30mA<br>BW=10Hz ~ 100KHz                                                                                             |                         |      | 65  |     | μV <sub>RMS</sub> |
| Current Limit                                             | I <sub>LIMIT</sub>   |                                                                                                                                                               |                         | 320  |     |     | mA                |
| Current Foldback                                          | I <sub>CFB</sub>     | R <sub>Load</sub> =1Ω                                                                                                                                         |                         |      | 100 |     | mA                |
| Output Discharge Resistance                               | R <sub>DIS</sub>     | V <sub>EN</sub> =0V                                                                                                                                           |                         |      | 60  |     | Ω                 |
| Thermal Shutdown Threshold <sup>(Note 7)</sup>            | T <sub>SD</sub>      |                                                                                                                                                               |                         |      | 160 |     | °C                |
| Thermal Shutdown Threshold Hysteresis <sup>(Note 7)</sup> | ΔT <sub>SD</sub>     |                                                                                                                                                               |                         |      | 30  |     | °C                |
| EN Pin Current                                            | I <sub>EN</sub>      | V <sub>EN</sub> =2.5V                                                                                                                                         |                         |      | 0.3 |     | uA                |
| EN Pin Threshold                                          | V <sub>EN(ON)</sub>  | Start-up                                                                                                                                                      |                         | 1.0  |     |     | V                 |
|                                                           | V <sub>EN(OFF)</sub> | Shutdown                                                                                                                                                      |                         |      |     | 0.4 | V                 |

Note 4: except EN pull down current ( $I_{EN}$ ).

Note 5: The dropout voltage is defined as  $V_{IN}-V_{OUT}$ , which is measured when  $V_{OUT}$  drops 2% of its normal value with the specified output current.

Note 6: Load regulation and dropout voltage are measured at a constant junction temperature by using a 40ms low duty cycle current pulse.

Note 7: Guarantee by design.

## Typical Performance Curves

$V_{IN}=V_{OUT}+1V$ , EN pin connected to  $V_{IN}$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified.

$V_{OUT}=3.3V$ ,  $I_{OUT}=0mA$

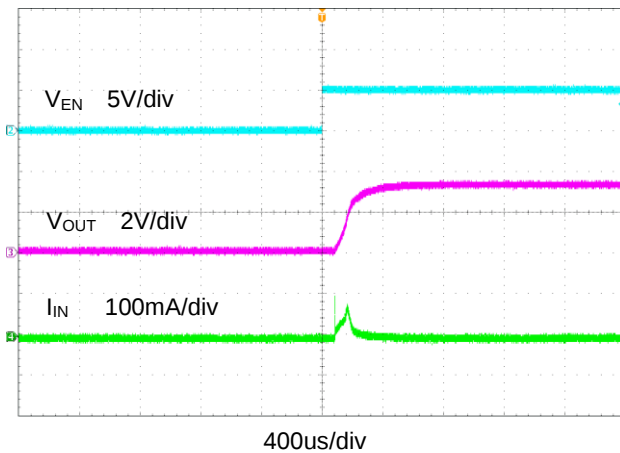


Figure 4. Turn ON Waveform

$V_{OUT}=3.3V$ ,  $I_{OUT}=0mA$

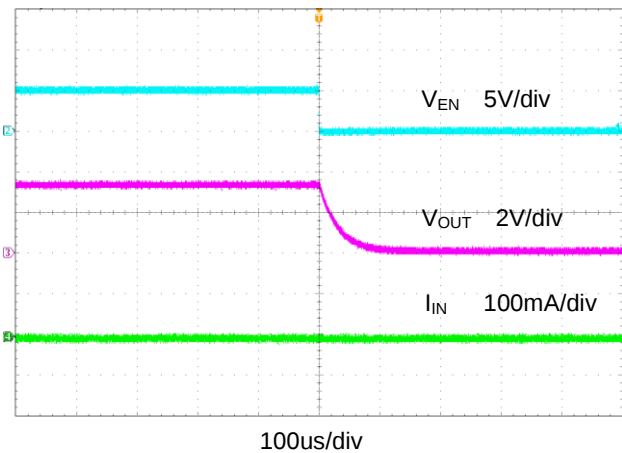


Figure 5. Turn OFF Waveform

$3.3V_{OUT}/I_{OUT}=1mA \rightarrow 300mA \rightarrow 1mA$

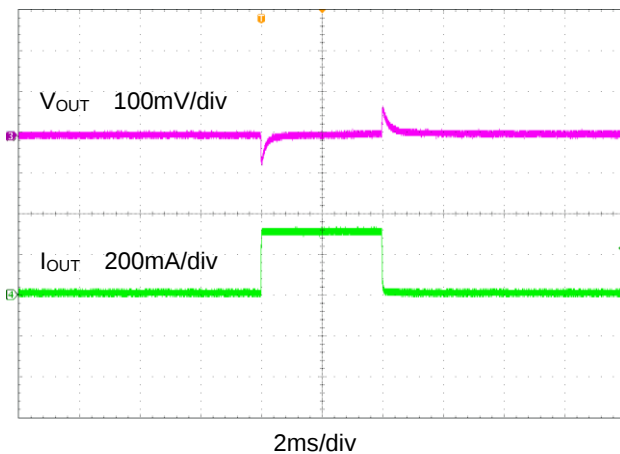


Figure 6. Load Transient Response

$3.3V_{OUT}/V_{IN}=3.6V \rightarrow 5.5V \rightarrow 3.6V$   $I_{OUT}=10mA$ ,  $C_{IN}=none$

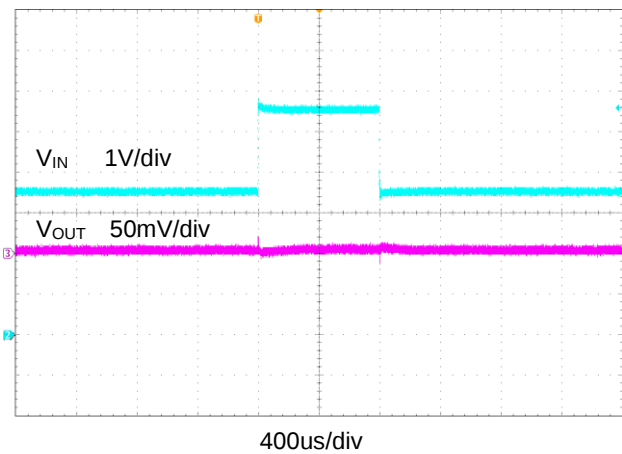


Figure 7. Line Transient Response

$V_{IN}=Li-ion Battery 3.6V$ ,  $V_{OUT}=1.8V$ ,  $I_{OUT}=0mA$

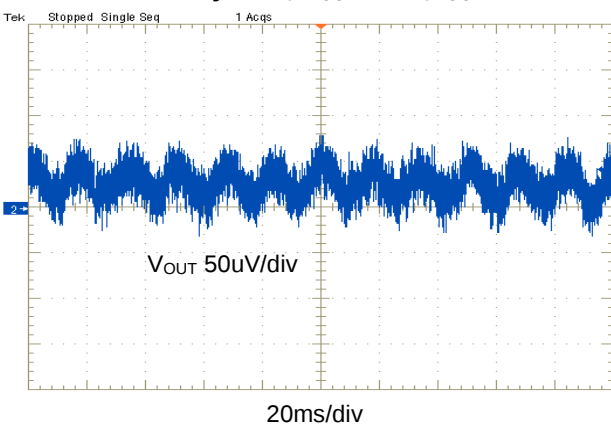


Figure 8. Output Noise Voltage

$V_{IN}=Li-ion Battery 3.6V$ ,  $V_{OUT}=1.8V$ ,  $I_{OUT}=1mA$

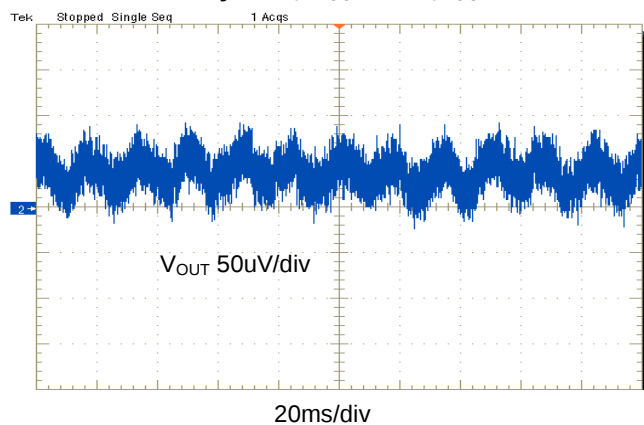


Figure 9. Output Noise Voltage

## Typical Performance Curves (Continued)

$V_{IN}=V_{OUT}+1V$ , EN pin connected to  $V_{IN}$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified.

$V_{OUT}=1.2V$ ,  $I_{OUT}=30mA$

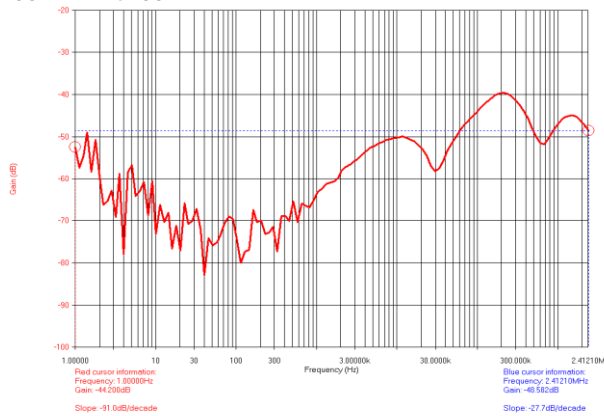


Figure 10. PSRR vs. Frequency

$V_{OUT}=2.8V$ ,  $I_{OUT}=30mA$

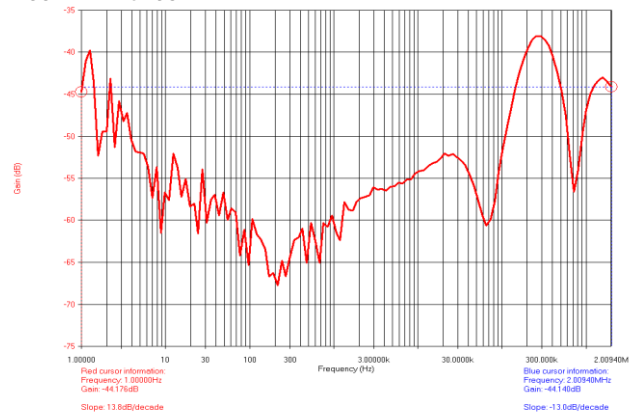


Figure 11. PSRR vs. Frequency

$V_{OUT}=3.3V$ ,  $I_{OUT}=30mA$

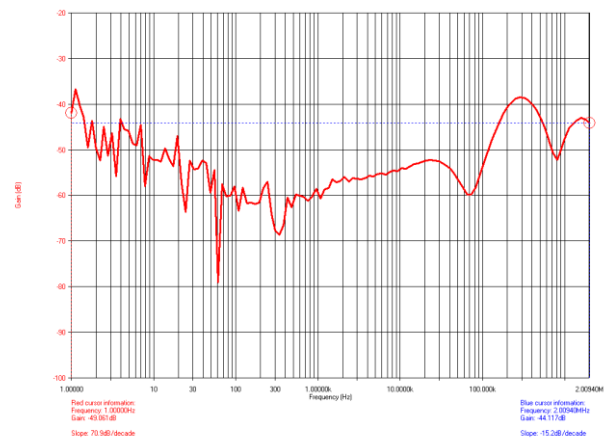


Figure 12. PSRR vs. Frequency

$V_{IN}=3.5V$ ,  $V_{OUT}=2.5V$

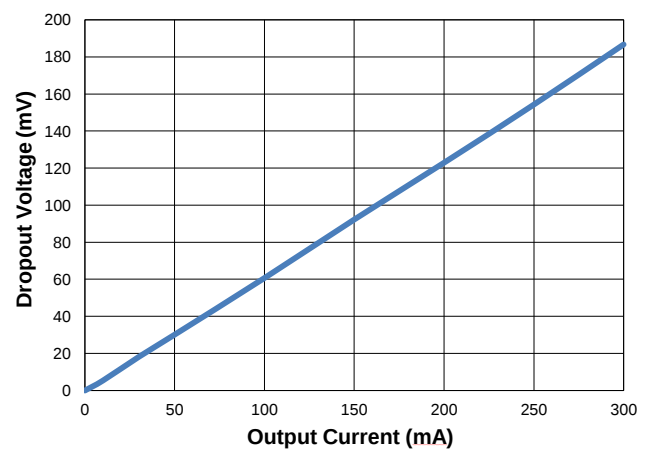


Figure 13. Dropout Voltage vs. Output Current

$V_{IN}=3.8V$ ,  $V_{OUT}=2.8V$

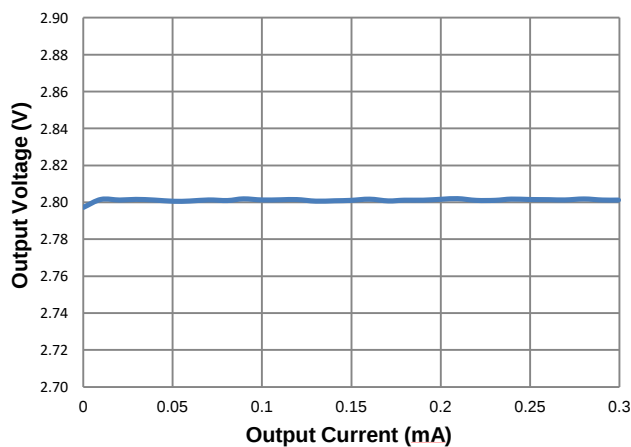


Figure 14. Output Voltage vs. Output Current

$V_{OUT}=3.3V$ ,  $I_{OUT}=1mA$

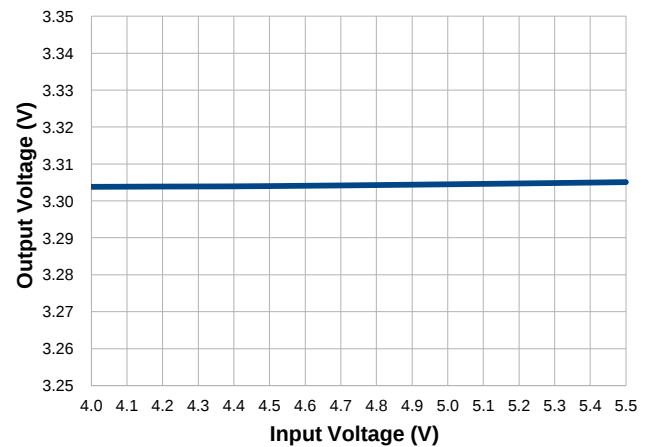


Figure 15. Output Voltage vs. Input Voltage

## Typical Performance Curves (Continued)

$V_{IN}=V_{OUT}+1V$ ,  $V_{EN}=5.0V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified.

$V_{OUT}=3.3V$

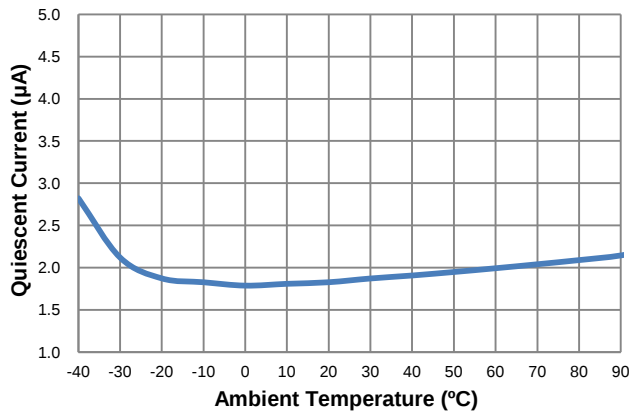


Figure 16. Quiescent Current vs. Ambient Temperature

$V_{OUT}=2.8V$

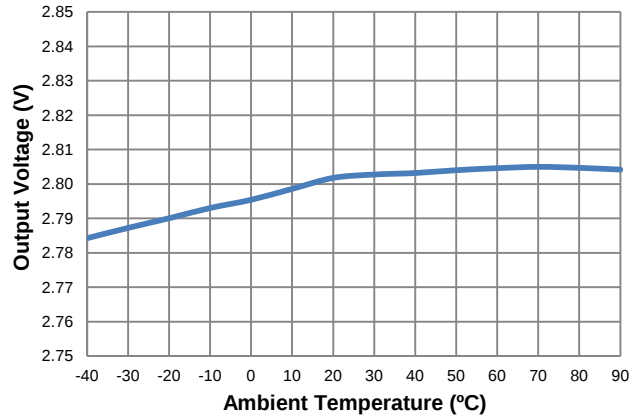


Figure 17. Output Voltage vs. Ambient Temperature

$V_{OUT}=1.2V$

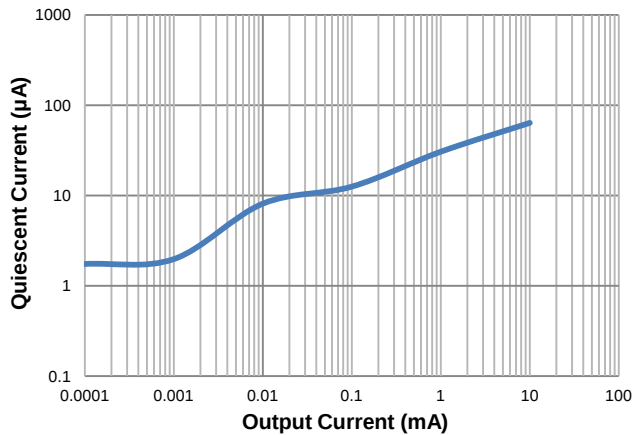


Figure 18. Quiescent Current vs. Output Current

$V_{OUT}=2.5V$

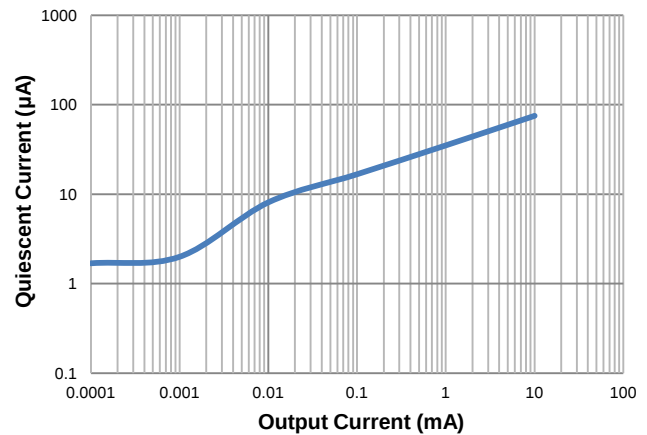


Figure 19. Quiescent Current vs. Output Current

$V_{OUT}=1.2V$

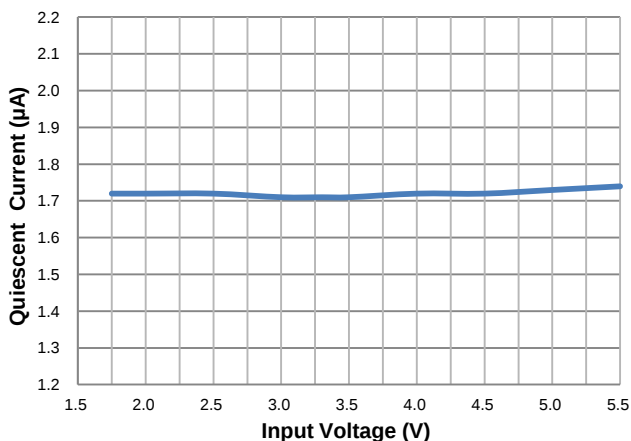


Figure 20. Quiescent Current vs. Input Voltage

$V_{OUT}=2.5V$

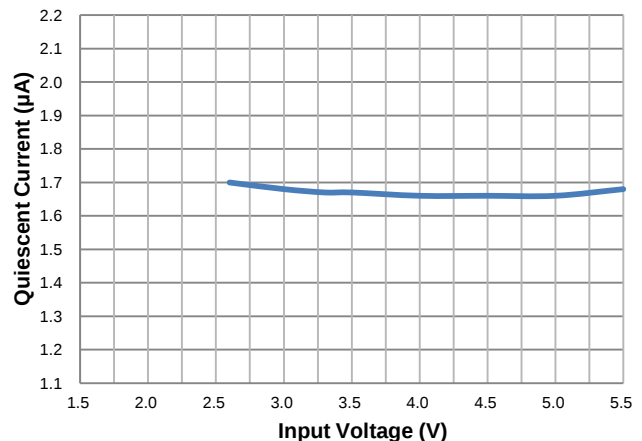


Figure 21. Quiescent Current vs. Input Voltage

## Application Information

The FP6185 is a low dropout linear regulator that could provide 300mA output current at dropout voltage about 180mV (2.5V output voltage).

### 1. Output and Input Capacitor

The FP6185 regulator is designed to be stable with a wide range of output capacitors. The ESR of the output capacitor affects stability. Larger value of the output capacitor decreases the peak deviations and improves transient response for larger current changes.

The capacitor types (aluminum, ceramic, and tantalum) have different characterizations such as temperature and voltage coefficients. All ceramic capacitors are manufactured with a variety of dielectrics, each with different behavior across temperature and applications. Common dielectrics used are X5R, X7R and Y5V. It is recommended to use 1μF to 10μF X5R or X7R dielectric ceramic capacitors with 30mΩ to 50mΩ ESR range between device outputs and ground for stability. The FP6185 is designed to be stable with low ESR ceramic capacitors and higher values of capacitors and ESR could improve output stability. The ESR of output capacitor is very important because it generates a zero to provide phase lead for loop stability.

There are no requirements for the ESR on the input capacitor, but its voltage and temperature coefficient have to be considered for device application environment.

### 2. Protection Features

In order to prevent overloading or thermal condition from damaging the device, FP6185 has internal thermal and current limiting functions designed to protect the device. It will rapidly shut off PMOS pass element during over-temperature condition.

### 3. Thermal Consideration

The power handling capability of the device will be limited by allowable operation junction temperature (125°C). The power dissipated by the device will be estimated by  $P_D = I_{OUT} \times (V_{IN} - V_{OUT})$ . The power dissipation should be lower than the maximum power dissipation listed in "Absolute Maximum Ratings" section.

### 4. Shutdown Operation

The FP6185 is shutdown by pulling the EN input low, and turned on by driving the EN high. If EN pin floating, the FP6185 will shut down because EN pin has built-in a pull low resistor (refer to Block Diagram).

### 5. Output Discharge Function


The FP6185 provides auto discharge function, an discharge MOSFET with  $R_{DS(ON)}$  of 60Ω typical is integrated between VOUT and GND pins, which can discharge the charge of the output capacitors quickly when turning off FP6185 with EN pin.

### 6. PCB Layout Recommendation

Place the input capacitors and output capacitors as close to the device as possible. The traces which connect to these capacitors should be as short and wide as possible to minimize parasitic inductance and resistance.

## Outline Information

SOT-23-5 Package (Unit: mm)

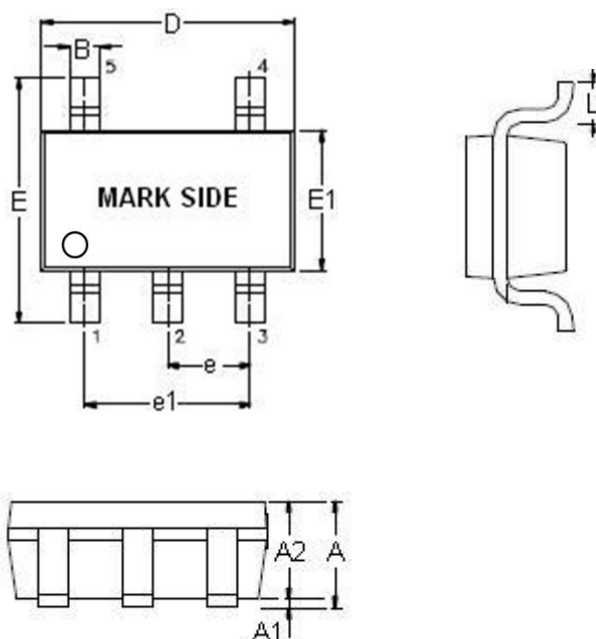


| SYMBOLS<br>UNIT | DIMENSION IN MILLIMETER |      |
|-----------------|-------------------------|------|
|                 | MIN                     | MAX  |
| A               | 0.90                    | 1.30 |
| A1              | 0.00                    | 0.15 |
| A2              | 0.90                    | 1.15 |
| B               | 0.30                    | 0.50 |
| D               | 2.80                    | 3.00 |
| E               | 2.60                    | 3.00 |
| E1              | 1.50                    | 1.70 |
| e               | 0.90                    | 1.00 |
| e1              | 1.80                    | 2.00 |
| L               | 0.30                    | 0.60 |

Note 8: Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.3mm.

Note 9: Followed From JEDEC MO-178-C.

## Carrier Dimensions

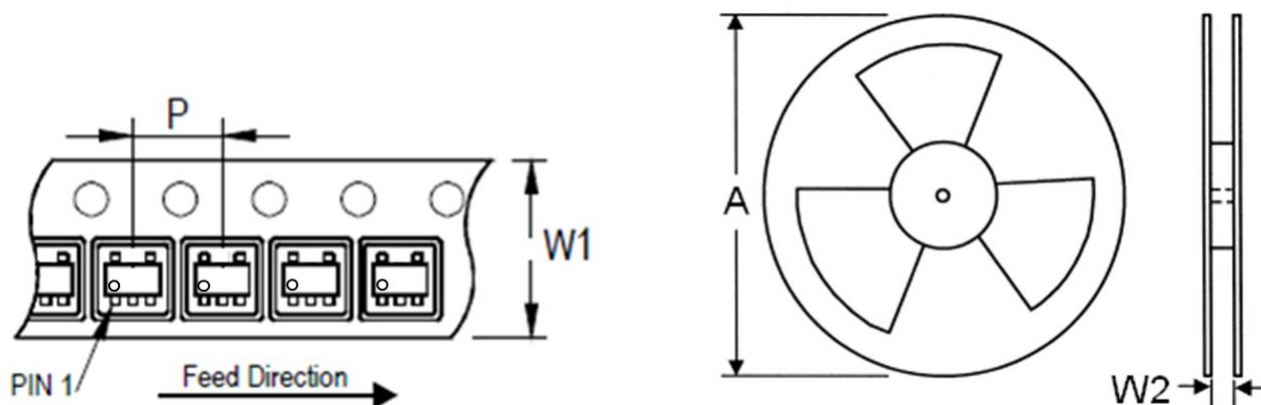

| Tape Size<br>(W1) mm | Pocket Pitch<br>(P) mm | Reel Size (A) |     | Reel Width<br>(W2) mm | Empty Cavity<br>Length mm | Units per Reel |
|----------------------|------------------------|---------------|-----|-----------------------|---------------------------|----------------|
|                      |                        | in            | mm  |                       |                           |                |
| 8                    | 4                      | 7             | 180 | 8.4                   | 300~1000                  | 3,000          |

### Life Support Policy

Fitipower's products are not authorized for use as critical components in life support devices or other medical systems.